


Liftor Entry

Installation guide

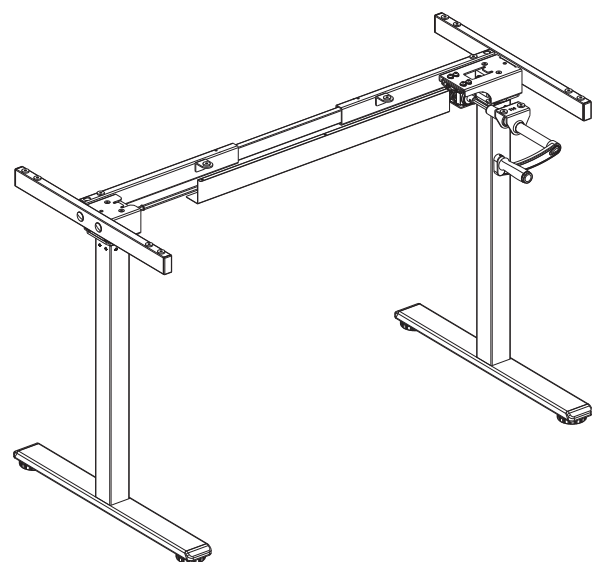

Technical Data

Product Model	HT116G
Column Stage	2
Max. Load Capacity	70KG
Max. Speed	10mm/round
Highest Position	1195mm
Lowest Position	715mm
Tabletop Dimensions	1000~1600mm(Length), 500~750mm(Width)
Temperature	0-40°C

Accessory list

Attention: The drawings below are for guidance only and they may differ slightly from the product and fittings received. Please contact customer service department if there are any missing tools or installation problems.

A

x4

Spout Plug

B

x2

ST4.2x16

C

x7

ST4.2x13

D

x4

M6x12

E

x4

M6x12

F

x8

M6x16

G

x10

ST4.2x55

H

x1

Crank Base

I

x2

4x4/5x5 Allen Key (crossing)


x2

2.5x2.5 Allen Key / Nut Wrench

Component List

No.	Part	Qty	No.	Part	Qty
①	 Left supporting beam	1	②	 Connecting rod for supporting beam	1
③	 Right supporting beam	1	④	 Transmission rod	1
⑤	 Support column	2	⑥	 Decorative plate	1
⑦	 Crank assembly	1	⑧	 Lifting Column	2
⑨	 Pedestal	2			

Installation Diagram

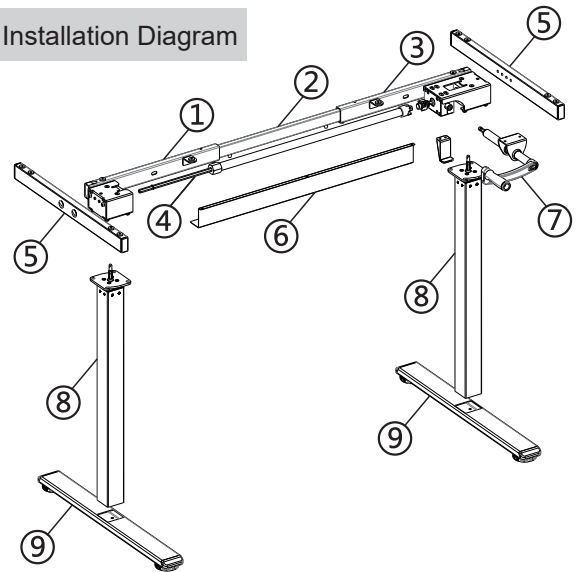


STEP1

Install supporting beams and Transmission rod

I x2
4x4/2.5x2.5

Insert from two sides to ensure labels on both sides are fully covered.

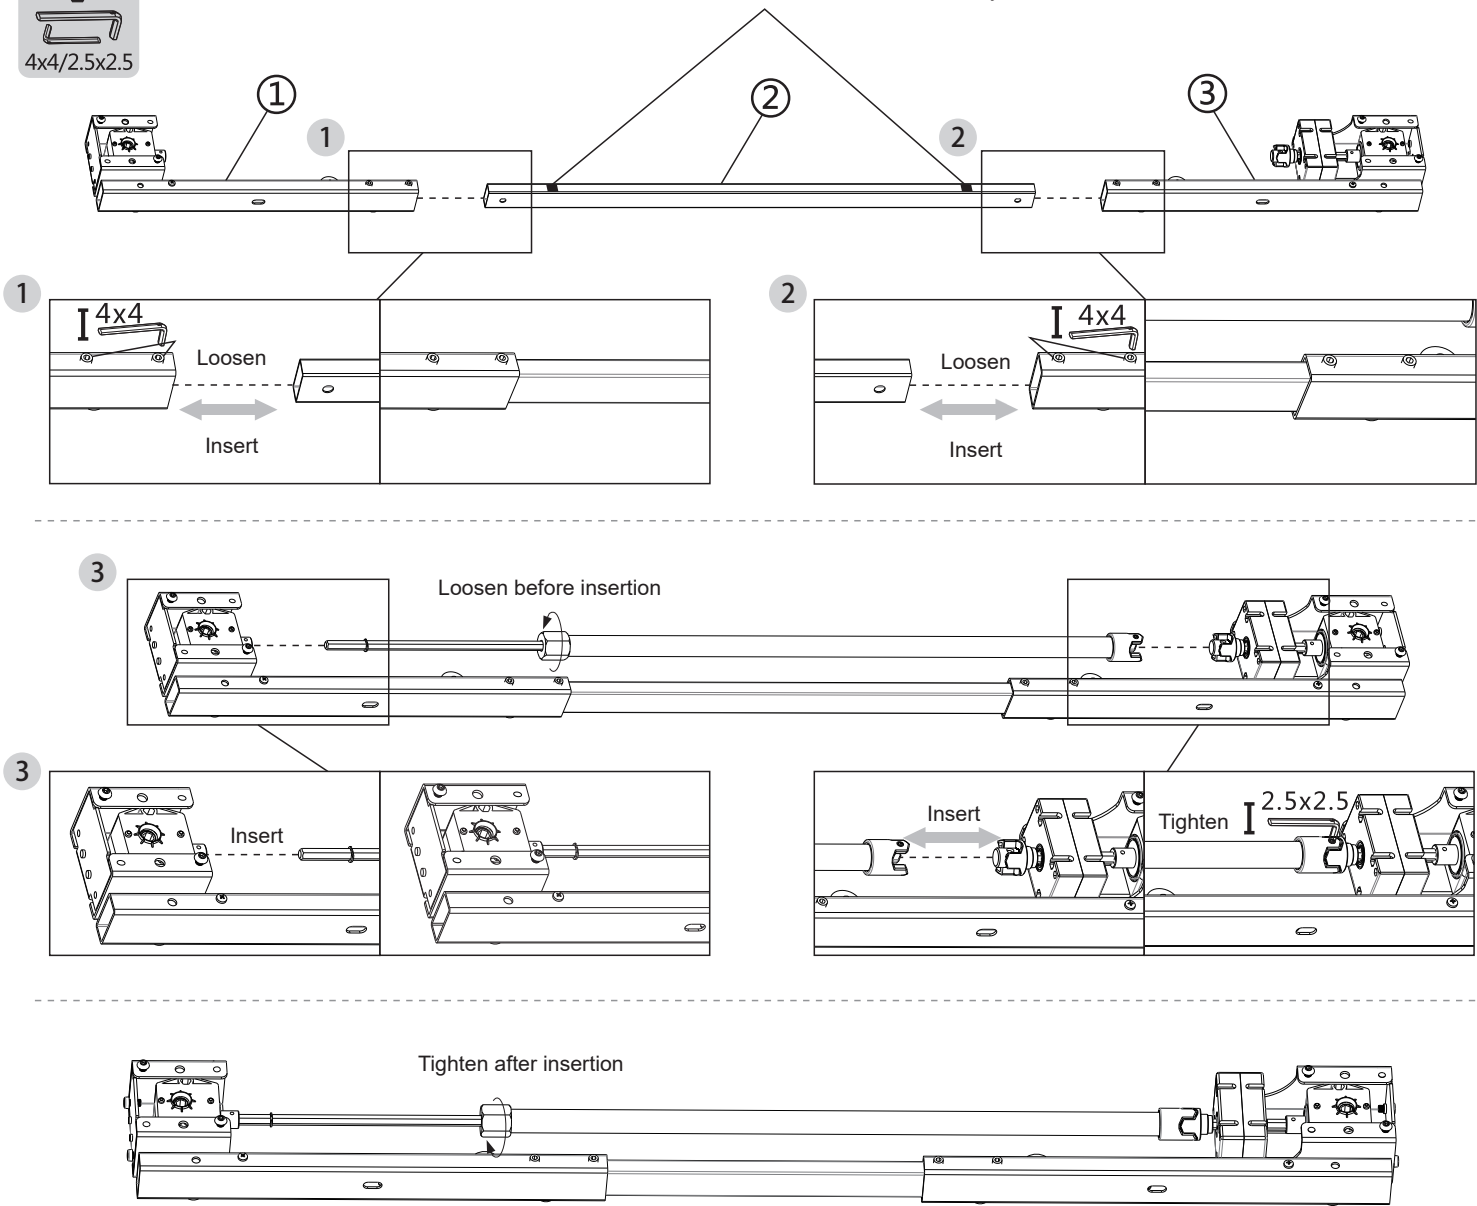


STEP2

Install Support column


A x4
Spout Plug

E x4
M6x12


I x1
5x5(crossing)

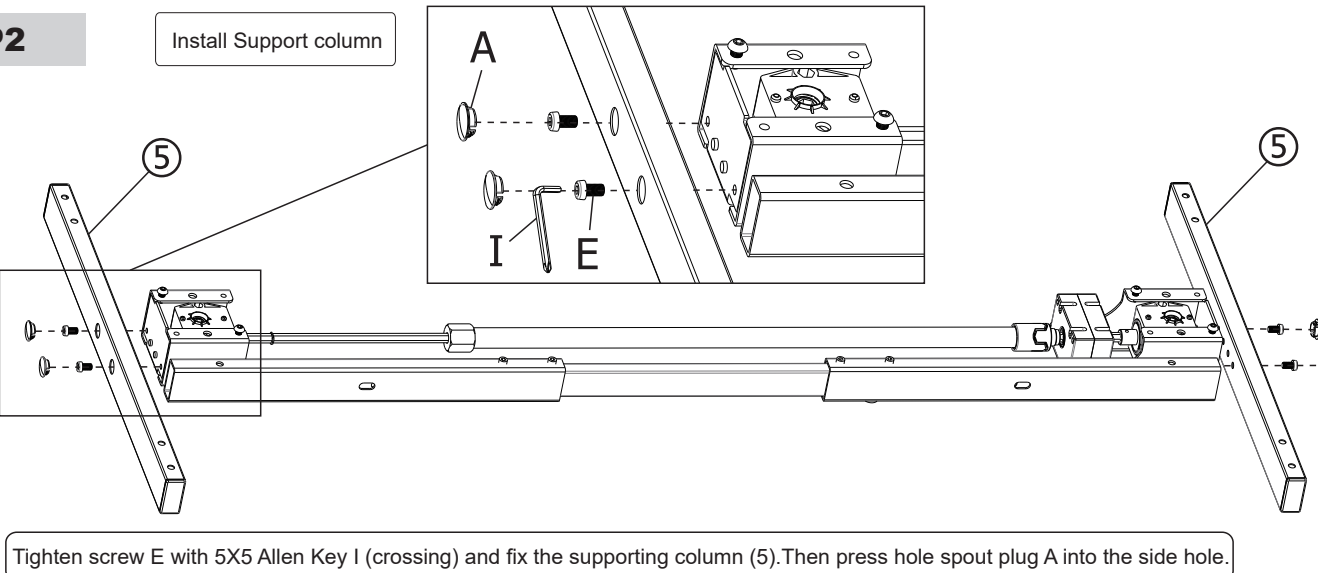


Fix the supporting beam to the tabletop



Install decorative plate




Install lifting columns



2. Rotate the table legs (8) to the position shown in the picture. After completely insertion, rotate it clockwise.

3. After rotation, screw screw D into the position shown in the figure with a 4x4 Allen Key I, and then tighten 8 screws D.

Install pedestal



STEP7


Install Crank Assembly

C x4
ST4.2x13

H x1
Crank Base

I x1
5x5(Crossing)

I x1
2.5x2.5

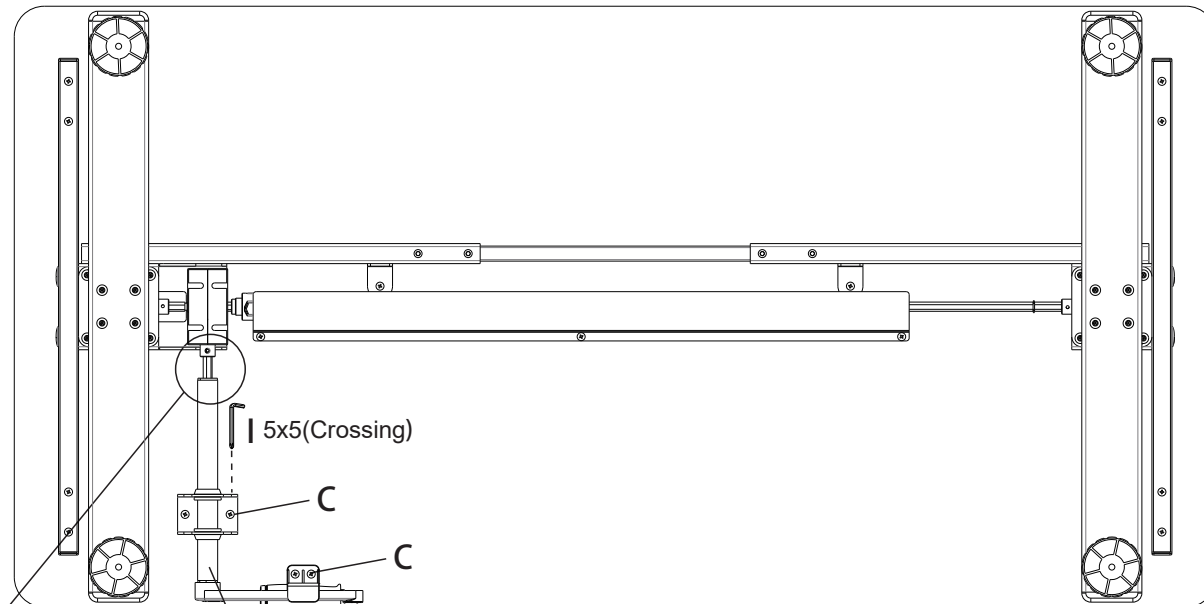

 Crank assembly should be installed vertically.

I(2.5x2.5)
Tighten

Use 5x5 (crossing) Allen Key I to tighten screw C to the crank assembly(7). Use screw C to fix the Crank Holder H to the crank assembly(7) into the right supporting beam assembly and tighten with 2.5x2.5 Allen Key I.



Warning

There's spare parts in the package, which will lead to asphyxia if swallowed by accident. Please keep out of the reach of children for the spare parts.

- Make sure you have read and comprehend the manual for installation. Please contact the specialized persons if there's any confusion in the steps.
- Children are forbidden to play on the product because of unforeseen action when playing, so any dangerous consequences caused by this improper action will not be on
- This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance.
- Children must not perform cleaning and user maintenance without supervision.
- Please make sure there is no hazard sources in your operating environment. e.g., do not litter the tools around. Always be careful to treat the packaging materials in order to avoid any possible danger, e.g. plastic bag may lead to choking hazard to children.
- Keep the original package of the equipment if necessary in case of the future use in transportation.

Waste disposal



This marking indicates that this product should not be disposed with other household wastes. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.

Importer:
Liftor s.r.o.
Pod Vinicemi 931/2, 301 00 Plzeň
www.liftor.cz